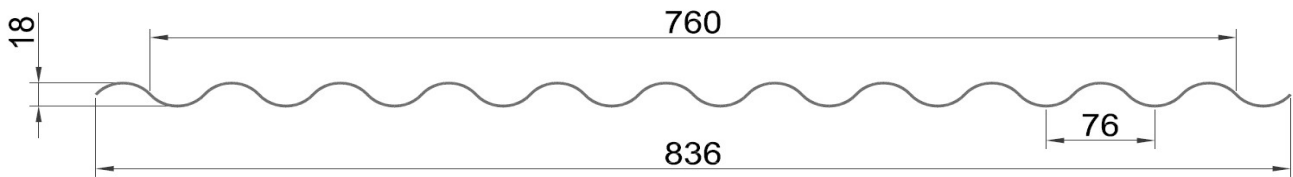


# Corrugated sheet 18/76







## Technical Data:

|                                     |        |                   |
|-------------------------------------|--------|-------------------|
| Thickness:                          | 0,56   | mm                |
| Total width:                        | 836    | mm                |
| Width after overlap (overlap 76mm): | 760    | mm                |
| Depth of corrugation:               | 18     | mm                |
| Corrugation radius:                 | 24     | mm                |
| Length:                             | < 8000 | mm                |
| Bending radius:                     | > 3000 | mm                |
| Weight with overlap:                | 5,4    | kg/m <sup>2</sup> |
| Weight without overlap:             | 4,9    | kg/m <sup>2</sup> |

|                            |                        |                       |
|----------------------------|------------------------|-----------------------|
| Galvanized:                | Z225 – Z275            |                       |
| Silicon polyester coating: | inside:                | 5-10 µm RAL 9002      |
|                            | outside:               | 25 µm 11 std. Colours |
| Optioal:                   | Perforated             |                       |
|                            | Condensation stop      |                       |
| Application:               | Roof and wall cladding |                       |

## Standard colours:

|                                                                                    |                       |                                                                                      |                          |
|------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------------------------------------|--------------------------|
|  | Galvanized            |  | RAL 6011 reseda green    |
|  | RAL 1015 light ivory  |  | RAL 7016 anthracite grey |
|  | RAL 3009 oxide red    |  | RAL 7035 light grey      |
|  | RAL 3016 coral red    |  | RAL 8014 sepia brown     |
|  | RAL 5010 gentian blue |  | RAL 9002 grey white      |
|  | RAL 6009 pine green   |  | RAL 9006 blank aluminium |

### Handelsonderneming J. Snoei B.V.

Van der Giessenweg 6  
2921 LP Krimpen a/d IJssel  
The Netherlands

P.O. Box 191  
2920 AD Krimpen a/d IJssel  
Web: [www.jsnoeibv.com](http://www.jsnoeibv.com)

Tel.: +31 (0)180 519 155  
Fax: +31 (0)180 519 597  
Mail: [info@jsnoeibv.com](mailto:info@jsnoeibv.com)

ABN AMRO Bank 47.92.73.944  
IBAN NL50ABNA0479273944  
BIC ABNANL2A

C.o.C. nr. Rotterdam 24147672  
VAT nr. NL 005667604B01